

FEBRUARY 25, 2021

CITY OF DE PERE

REQUEST FOR PROPOSALS

PROJECT 21-19

MUDJACKING - CURB & GUTTER AND SIDEWALK

VARIOUS LOCATIONS

Sealed proposals will be received by the Board of Public Works of the City of De Pere at the Municipal Service Center, 925 South Sixth Street, De Pere, Wisconsin 54115, until 1:00 P.M., **Thursday, March 18, 2021**, at which time they will be publicly opened and read aloud. The bid opening will occur virtually. See the proposal forms and specifications for additional information.

Project 21-19 for which proposals are being sought includes the following approximate quantities:

- 100 LF Mud-Jacking Curb & Gutter
- 2,800 SF Mud-Jacking Sidewalk

All proposals shall be submitted on forms provided by the City of De Pere. Proposal forms and specifications may be viewed by emailing dppubwrks@deperewi.gov.

The letting of the contract is subject to the provisions of Wisconsin Statute Section 62.15 regarding Public Works.

The City of De Pere reserves the right to reject any or all proposals, to waive any informalities in bidding and to accept any proposal which the Common Council deems most favorable to the interests of the City of De Pere.

Dated this 25th of February 2021.

Board of Public Works
City of De Pere
Eric Rakers, P.E.
City Engineer

Project 21-19

CITY OF DE PERE - BOARD OF PUBLIC WORKS

SCHEDULE OF PRICES

PROJECT 21-19

MUDJACKING - CURB & GUTTER AND SIDEWALK

VARIOUS LOCATIONS

ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	AMOUNT BID
SD-01	Mud-Jacking Curb & Gutter	LF	100*	\$	\$
SD-02	Mud-Jacking Sidewalk	LF	2,800*	\$	\$
TOTAL					\$

* Estimate, final totals determined in field.

PROPOSAL

This Proposal, submitted by the undersigned to the Board of Public Works of the City of De Pere, agrees to perform all work specified herein within fourteen (14) consecutive calendar days of the date of notification of acceptance of this proposal. The undersigned bidder, being duly sworn, does depose and say that they are an authorized representative of

_____ and that the said bidder has examined and carefully prepared bid from the Special Provisions and Location Maps, and has checked the same in detail before submitting said proposal or bid; and that said bidder or their agents, officer, or employees have not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with this proposal or bid.

(Signature of Bidder)

TITLE _____

Print or Type Name of Bidder

CITY OF DE PERE - BOARD OF PUBLIC WORKS

SPECIAL PROVISIONS

PROJECT 21-19

MUDJACKING - CURB & GUTTER AND SIDEWALK

VARIOUS LOCATIONS

1. SCOPE OF WORK

The work under this proposal includes the mudjacking as specified herein at various locations in the City of De Pere. Submittal of proposals, insurance and work to be performed shall conform to pertinent requirements of the General Requirements of the City of De Pere 2020 Construction Specifications found on the City of De Pere Website and these Special Provisions. Attached is a sample agreement that will be executed with the successful bidder.

2. OPENING BIDS

Bids will be opened at the time and place indicated in the Request for Proposals. The bid opening can be viewed live via GoToMeeting information shown below. With the current COVID-19 restrictions, the Municipal Service Center is closed for access. An abstract of the amounts of the base bids and major alternates, if any, will be made available to Bidders after opening the bids.

The bid opening can be viewed live via GoToMeeting as follows:
Please join my meeting from your computer, tablet or smartphone.

<https://global.gotomeeting.com/join/702570621>

You can also dial in using your phone.
(For supported devices, tap a one-touch number below to join instantly.)

United States (Toll Free): 1 877 309 2073
- One-touch: <tel:+18773092073,,702570621#>

Access Code: 702-570-621

New to GoToMeeting? Get the app now and be ready when your first meeting starts:
<https://global.gotomeeting.com/install/702570621>

3. MUD-JACKING

A. See Attached Section 32 01 20 Mud-Jacking.

B. The unit price for Mud-Jacking work includes:

1. Traffic Control
2. Provide grout holes
3. Provide and install grout
4. Clear grout holes and seal with cement

C. Measurement: The City will measure Mud-jacking by the square foot for sidewalk and pavement based on the joints, and by the lineal foot along the flow line for curb & gutter acceptably completed.

D. Payment: The City will pay for measured quantities at the contract unit price under the following bid items:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
SD-01	Mud-Jacking, Curb & Gutter	LF
SD-02	Mud-Jacking, Sidewalk	SF

3. PROSECUTION AND PROGRESS

The Contractor will call or meet at least once a day with the Engineer to report job progress and receive new job assignments while work on this proposal is in progress. The Contractor will notify the Engineer within 24 hours of any unsuccessful attempt to mudjack any item requested by the Engineer.

A sample contractor's agreement is attached to this proposal for your consideration.

SECTION 32 01 20

MUD-JACKING

PART 1 – GENERAL

1.1 SUMMARY

- A. Section Includes
 - 1. Mud-Jacking Concrete
 - 2. Mud-Jacking Hole Restoration
 - 3. Clean-up

1.2 REFERENCES (Not Used)

1.3 SUBMITTALS

- A. Grout mix design.

PART 2 – PRODUCTS

2.1 MATERIALS

- A. Certified grout mix shall contain a minimum of 7 percent Portland Cement.

PART 3 – EXECUTION

3.1 MUDJACKING CONCRETE

- A. Holes for injecting the grout mix will be spaced not less than 12 inches nor more than 18 inches from a traverse joint or crack and spaced not more than six (6) inches from center of the hole to center of hole.
- B. The grout mix will have a consistency stiff enough to raise the concrete without blowing or leaking, and yet fluid enough to prevent pyramiding.
- C. The hole size for slab raising operations shall be a minimum of one inch (1") up to a maximum of two inches (2") in diameter.
- D. The holes shall be spaced as necessary to uniformly assure complete communication of slurry between holes.
- E. Slabs shall be raised to the required elevation and pitched at one-quarter (1/4) inch

per twelve (12) inches of lineal run, or as directed by the Engineer.




3.2 MUD-JACK HOLE RESTORATION

- A. All jacking operation holes will be cleared of the grout mix and filled with a stiff 1:3 cement mix, which will be consolidated and finished smooth.
- B. Holes shall be cleaned the full depth of the slab by removing excess slurry and wire brushing exposed sidewalls.
- C. Prior to placement of the Portland Cement, the surface around the holes shall be damp.

3.3 CLEAN-UP

- A. Slabs raised shall be thoroughly scraped and swept after completion, but prior to patching.
- B. Surrounding grass areas adjacent to slab raising shall be left in a clean, non-debrised condition.

END OF SECTION

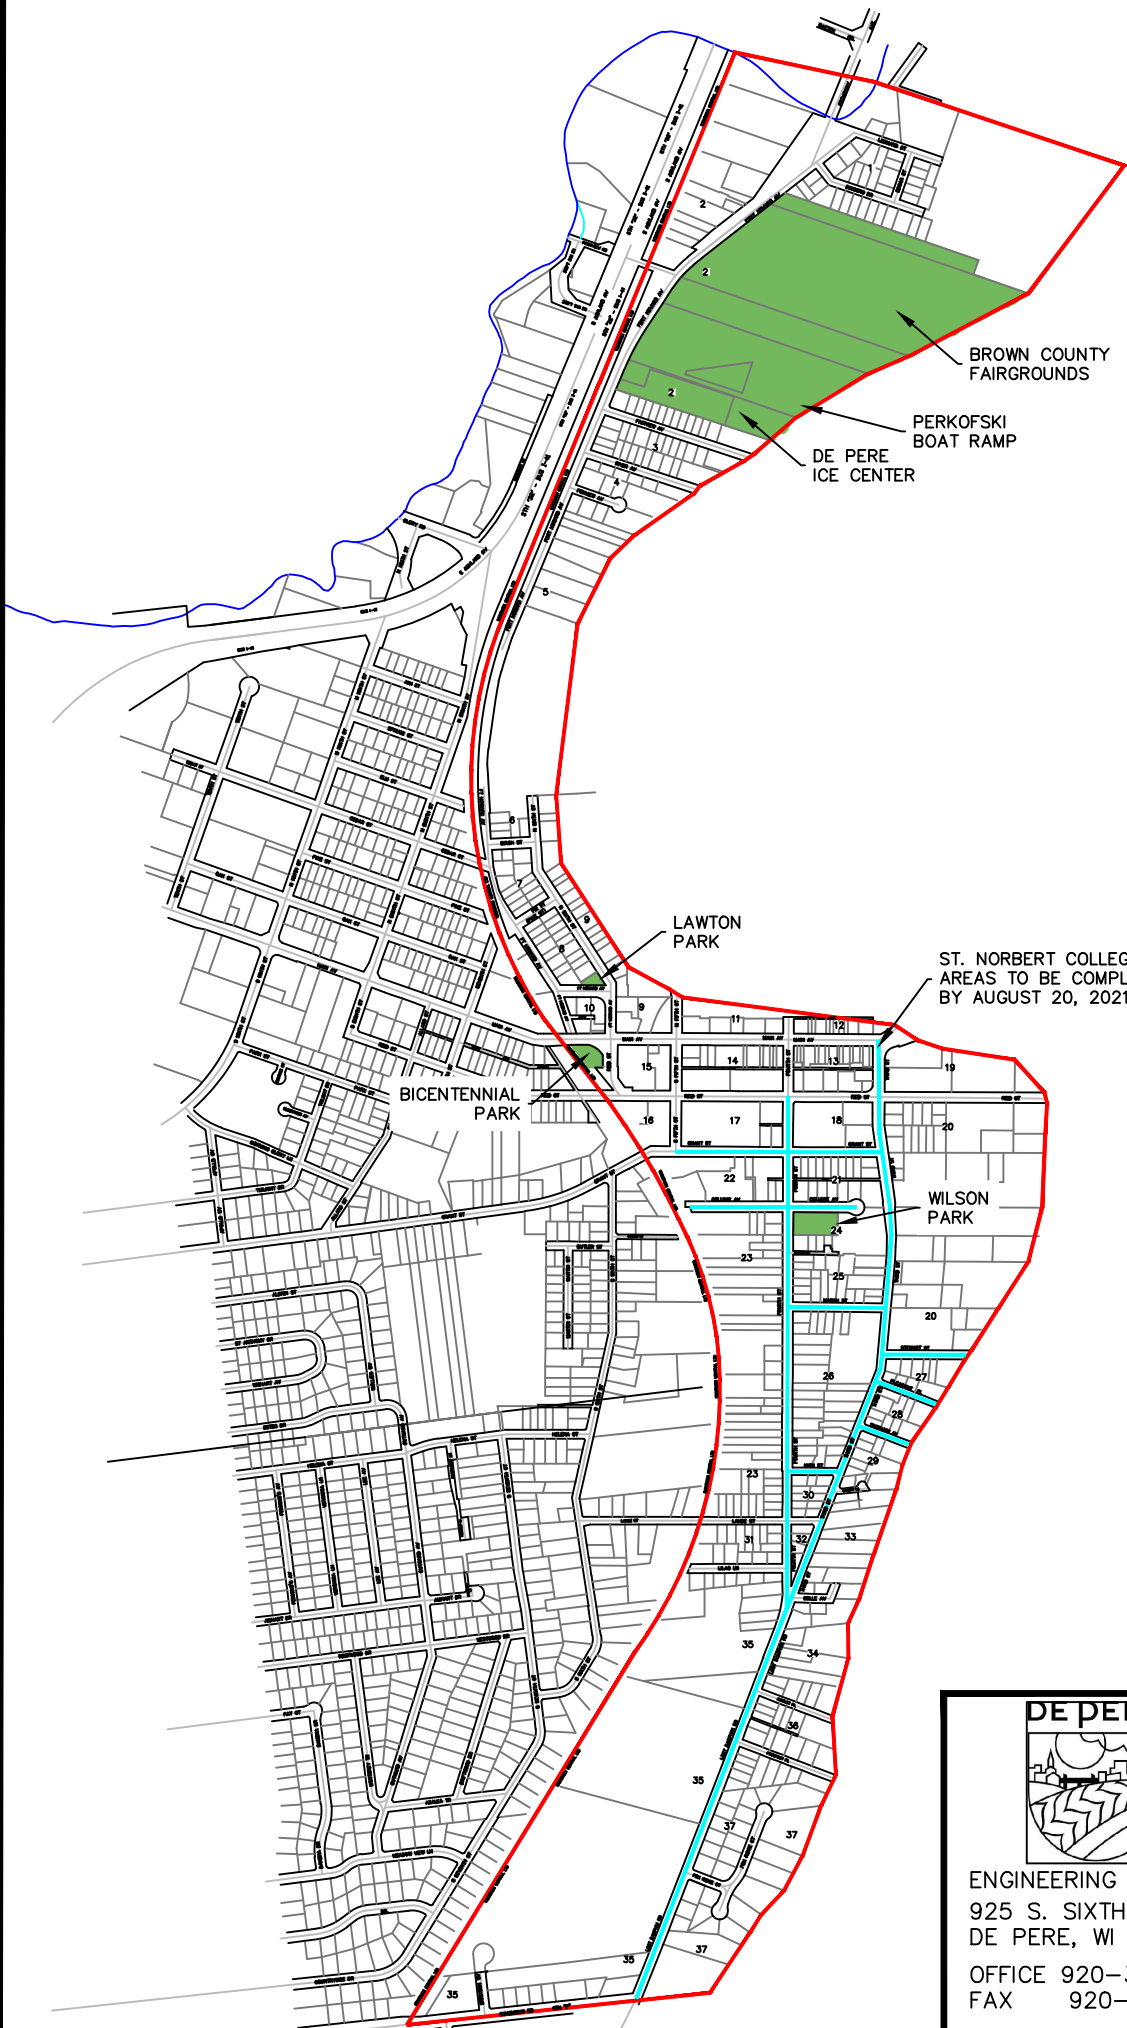

ENGINEERING DIVISION
925 S. SIXTH ST
DE PERE, WI 54115
OFFICE 920-339-4061
FAX 920-339-4071

EXHIBIT A
2021 SIDEWALK
REPAIR AREA

PROJECT:
21-05

DATE: JANUARY 2021
BY: KAD
CHECKED: CKK